



TECHNICAL GUIDES

> STACK DIMENSIONS – Skillful engineering provides the smallest stack in the industry

■ SLIMLINE

Minimum clear pocket width (250mm)

■ WIDE BODY

Minimum clear pocket width (350mm)

■ Maximum space between locking posts:

- 3000mm on full height.
- 1800mm on counter height and at centre of every curve.
- 76mm to stack per intermediate post.
- 203mm to stack per Emergency Egress Door.


> CURVE DETAILS

■ SLIMLINE (Radius 407mm) to centre

- Curve 90° • X (635mm)
- Curve 45° • X (318mm)

■ WIDE BODY (Radius 559mm) to centre

- Curve 90° • X (877mm)
- Curve 45° • X (439mm)

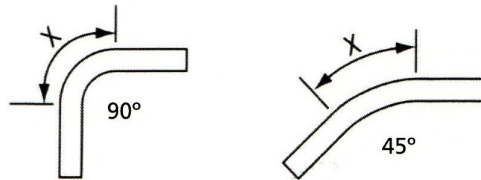

□ Special curves available only with template supplied. (minimum 1500mm radius)

□ Curves cannot be greater than 90°


Note: For adequate support double (19mm) plywood eliminates problems with blocking of curved layouts.

□ 250mm radius applicable to Dynasty Models only.

> RIGHT ANGLE POCKET SPECIFICATIONS


■ SLIMLINE – 125mm on centre of track to exterior

A Pocket Width (mm)	B Pocket Width (mm)
250mm	667mm
250mm	521mm
254mm	387mm
279mm	356mm
305mm	324mm
330mm	292mm
356mm	273mm
381mm	254mm
406mm	241mm



■ WIDE BODY – 175mm on centre of track to exterior

A Pocket Width (mm)	B Pocket Width (mm)
350mm	660mm
356mm	508mm
419mm	432mm
508mm	356mm
660mm	330mm



NOTE: Radius of 407 & 559 allow end user remarkably smooth and simple operation.

Other radii available on request. Minimum 1500mm